

SEIKO


QUARTZ TIMER



QUARTZ TIMER QBT-30

An intelligent timer for
offices, schools, factories,
and other locations.

Melody time signals are programmable
for up to one week.

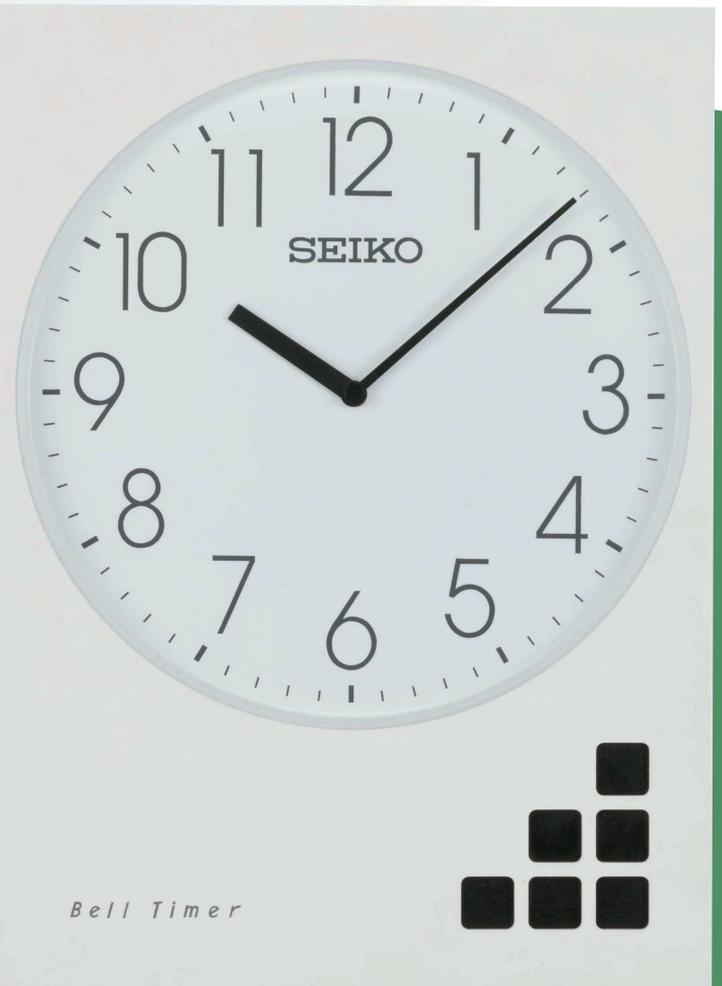

SEIKO TIME SYSTEMS INC.

<http://www.seiko-sts.co.jp/>

SEIKO

QUARTZ TIMER QBT-30

Announces the start of work, lunchtime, and the end of work with beautiful melodies. Refined design and outstanding function make this a necessity for every office.


- Up to 60 programs can be set a week at a time.
- Different settings for each day of the week are OK.
Resetting for different times each day is simple and convenient.
- The 4 melodies can be combined as preferred.
- External output can be used to manage lighting, air-conditioning, and so on.

Westminster Chime(40 Sec.)	Yuyake Koyake(40 Sec.)
Going Home(45 Sec.)	Etude Op. 10, No. 3(45 Sec.)



For example, a setting like this is easy to do!

Manage time at school or in the office or the way you've always wanted to!

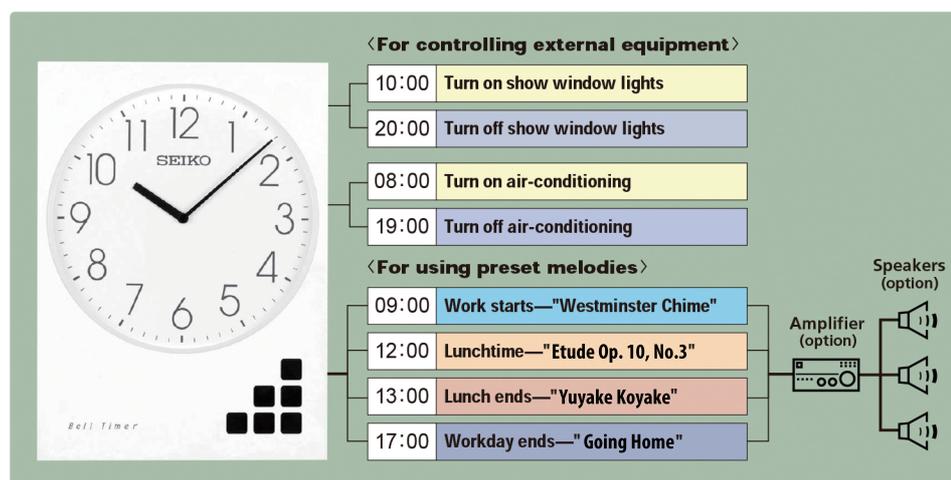

SPECIFICATIONS	
Input Power supply	AC90V~AC120V, AC200V~AC240V, 50/60Hz
Power consumption	approx. 4.0W
Power failure backup	Clock : 24 hours, Programs : 10 years
Operating temperature range	-10°C ~ +50°C
Timing accuracy	Within ±3 sec./month (+5~+35°C)
Signal output	2 independent channels (dry contact signal)
Contact output capacity	AC125V / 5 A, AC250V / 3A, DC30V / 5A
Program setting range	In 1-minute increment
Dimensions	W270×H372×D58.5 (mm)
Weight	approx. 2.0 kg (main body)

SEIKO TIME SYSTEMS INC.

2-4-3, Fukuzumi, Koto-ku, Tokyo 135-8610, Japan
Phone: (+81) 3-5646-1601 / Fax: (+81) 3-5646-1602

<http://www.seiko-sts.co.jp>